


# Turret Mountings



Turret mountings are designed primarily for the HVAC industry, they are a low cost design, ideal for static applications. The rubber completely encapsulates the metal parts to avoid corrosion problems.




They give relatively high levels of deflection, allowing for good levels of vibration reduction to be achieved, even at low running speeds.

## Advantages:


- Encapsulated Metals
- High Deflection
- Low Cost
- Easy to Install

## Applications:

- HVAC
- Fans
- Pumps
- Compressors

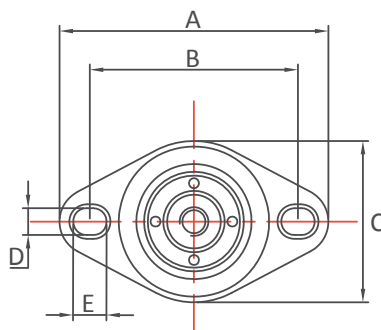

Type A

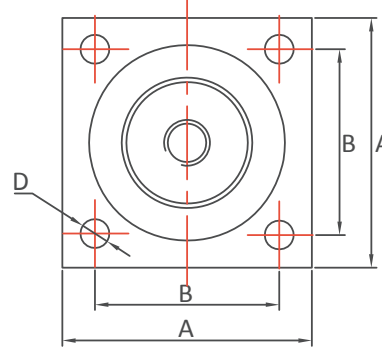

Type B Not Encapsulated

| Part No | Type | A mm | B mm    | C mm | D mm | E mm | F mm | G mm | H mm | I mm |
|---------|------|------|---------|------|------|------|------|------|------|------|
| TM229   | A    | 62   | 49.2    | 38   | 4.8  | 4.8  | 29.5 | 5.5  | 35.3 | M8   |
| TMS     | A    | 80   | 54-60   | 45   | 9    | 12   | 32   | 5    | 41   | M8   |
| TMM     | A    | 95   | 67-76   | 60   | 9    | 14   | 45   | 5    | 56   | M10  |
| TML     | A    | 150  | 105-126 | 86   | 11   | 22.5 | 70   | 6    | 82   | M12  |
| TMC6535 | B    | 65   | 48      | -    | 7.5  | -    | 36   | 2    | 51   | M10  |

| Part No     | Max Load (Kg) | Max Deflection (mm) | Hardness Shore A | Colour Code |
|-------------|---------------|---------------------|------------------|-------------|
| TM229-40    | 5             | 2.7                 | 40               | PURPLE      |
| TM229-50    | 10            | 2.5                 | 50               | GREEN       |
| TM229-60    | 15            | 2.0                 | 60               | YELLOW      |
| TMS08035-45 | 35            | 8.0                 | 45               | YELLOW      |
| TMS08065-55 | 65            | 8.0                 | 55               | BLUE        |
| TMS08100-65 | 100           | 8.0                 | 65               | RED         |
| TMM10130-45 | 130           | 10.0                | 45               | YELLOW      |
| TMM10225-55 | 225           | 10.0                | 55               | BLUE        |
| TMM10350-65 | 350           | 10.0                | 65               | RED         |
| TML10185-45 | 185           | 10.0                | 45               | YELLOW      |
| TML10320-55 | 320           | 10.0                | 55               | BLUE        |
| TML10500-65 | 500           | 10.0                | 65               | RED         |
| TMC6535-45  | 45            | 5.6                 | 45               | WHITE       |
| TMC6535-55  | 75            | 5.9                 | 55               | RED         |
| TMC6535-65  | 115           | 5.0                 | 65               | BLACK       |

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.

We reserve the right to alter specifications or withdraw products without notice.